

Features


- Lower ESR ,
- Wider temperature range
- RoHS compliant
- Consumer electronic
- Pulse power
- Hold-up power



Items	Characteristics		
Rated Voltage	3.8V~2.5V		
Operating Temperature Range	-25 ~+70°C		
Surge Voltage	4.0V		
Capacitance Range	30~220 F		
Capacitance Tolerance (20°C)	-20~+20%		
Temperature Characteristics	The specifications shall be met at category temperature range form -25°C to 70°C	Capacitance Change	Within 30% of the value at 20°C
		ESR	Less than 400% of the value at 20°C
High Temperature Loaded	The specifications shall be met after rated voltage applied at 70°C for 1000 hours	Capacitance Change	Within 30% of the initial value
		ESR	Less than 200% of specified value
High Temperature Storage	The specifications shall be met after storage at 70°C for 1000 hours	Capacitance Change	Within 30% of the initial value
		ESR	Less than 200% of specified value
Cycle Life	The specifications shall be met after 100,000 cycles at 25°C, cycle of charge/-discharge from 3.8~2.5V	Capacitance Change	Within 30% of the initial value
		ESR	Less than 200% of specified value

Dimensions

mm

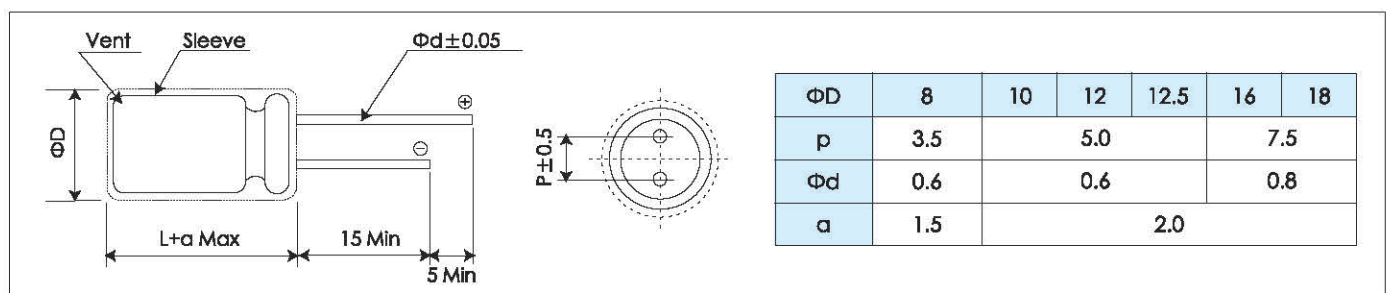

Standard Ratings for SCCHBR Series

U _R (Surge Voltage) Code	Rated Capacitance 25°C	Impedance		Max. Constant Discharge Current	Self Discharge Current	Size ΦD×L	P/N
		ESR _{DC}	ESR _{AC} 1KHz				
(V)	(F)	(mΩ)	(mΩ)	(A)	(mA)	(mm)	-
3.8 (4.0) 3R8	30	350	250	0.3	0.35	10×16	SCCHBR3R8306MRH100016E
	50	330	250	0.5	0.60	10×20	SCCHBR3R8506MRH100020E
	70	150	100	0.7	0.80	10×25	SCCHBR3R8706MRH100025E
	120	120	80	1.2	1.40	12.5×25	SCCHBR3R8127MRH125025E
	220	100	60	2.2	2.50	16×25	SCCHBR3R8227MRH160025E